interphone *F3*MC

QUICK GUIDE EN

Bluetooth®

interphone F3MC
Weather Protection Skin

WE RECOMMEND YOU CHECK FOR
SOFTWARE UPDATES ON THE WEBSITE
WWW.INTERPHONE.COM

cellularline

www.interphone.com
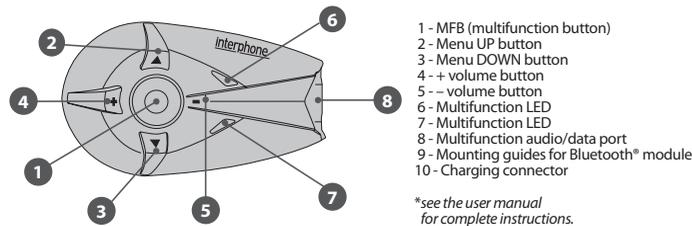
1 - MFB (multifunction button)
2 - Menu UP button
3 - Menu DOWN button
4 - + volume button
5 - – volume button
6 - Multifunction LED
7 - Multifunction LED
8 - Multifunction audio/data port
9 - Mounting guides for Bluetooth® module
10 - Charging connector

*see the user manual
 for complete instructions.*

A

B

C
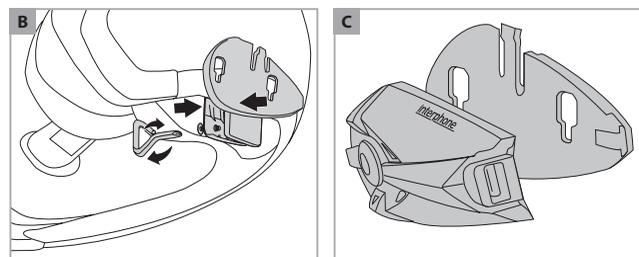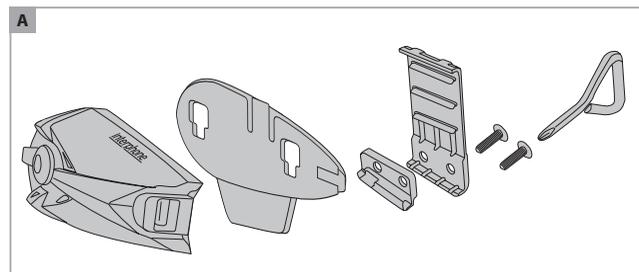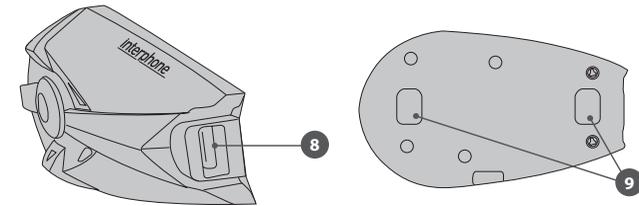
ASSEMBLY OF THE SLIDE SUPPORT WITH REMOVABLE CLIP

Take the support and note the best place to fasten it to the side of the helmet. Insert the rear part of the clip into the helmet and attach the other part on the outside.

PHASE 1

PHASE 2

PHASE 3

PHASE 4
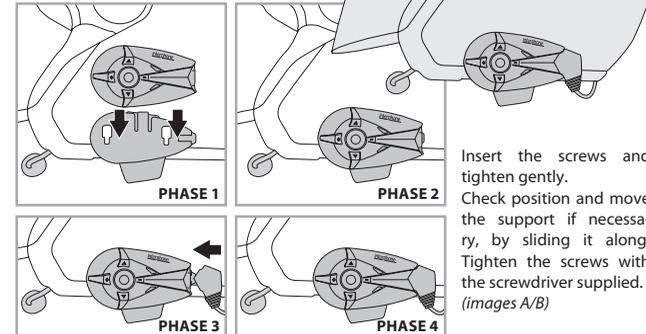
Insert the screws and tighten gently.
Check position and move the support if necessary, by sliding it along. Tighten the screws with the screwdriver supplied. *(images A/B)*

ASSEMBLY OF THE ADHESIVE SLIDE SUPPORT

Take the adhesive support and look for the best side and place to position it. Clean and de-grease the part of the helmet where you are going to stick the support (do not use any detergents that could damage the hel-

PHASE 1

PHASE 2

PHASE 3

PHASE 4
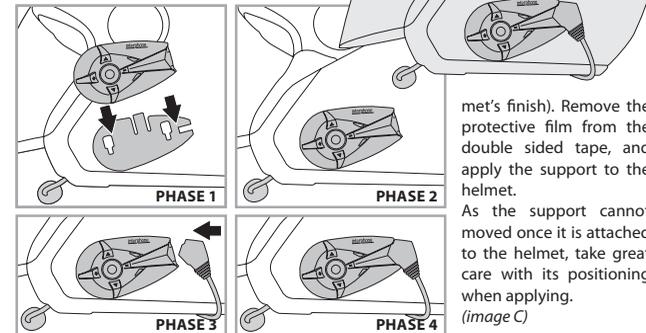
met's finish). Remove the protective film from the double sided tape, and apply the support to the helmet.
As the support cannot moved once it is attached to the helmet, take great care with its positioning when applying. *(image C)*

A - GREEN
B - RED
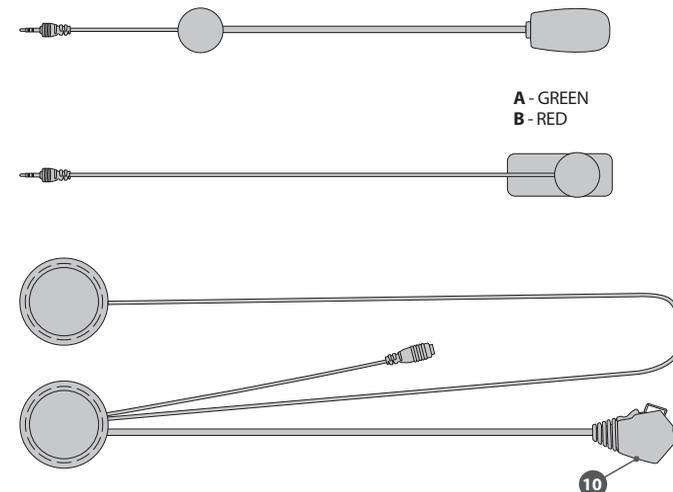
MOUNTING ON
FULL-FACE HELMET

MOUNTING ON
MODULAR HELMET

MOUNTING ON
OPEN-FACE HELMET

MOUNTING ON
FULL-FACE HELMET

MOUNTING ON
MODULAR AND
OPEN-FACE
HELMETS

F3MC VOICE MENU DIAGRAM

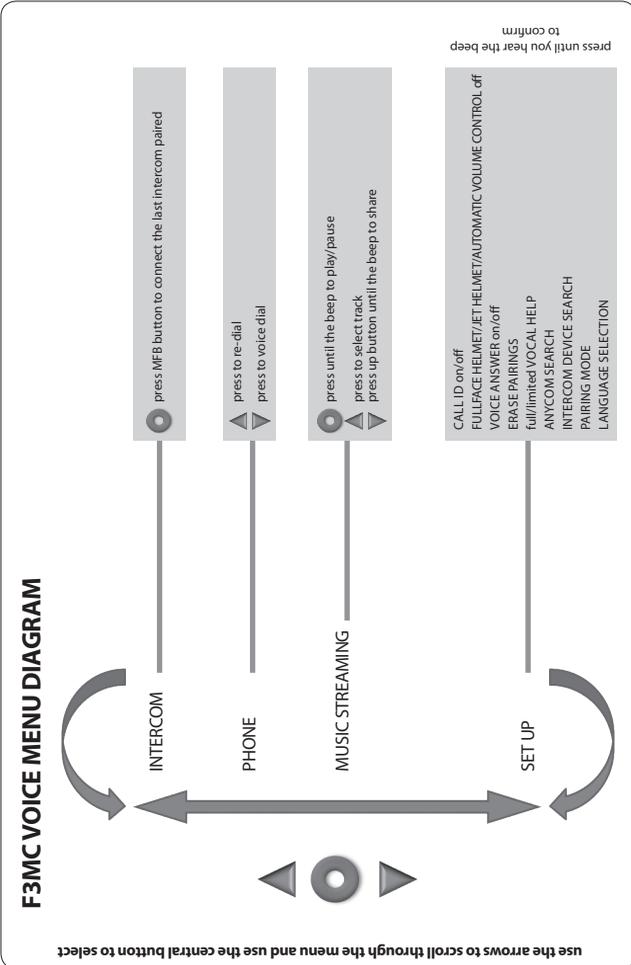use the arrows to scroll through the menu and use the central button to select

INTERCOM

PHONE

MUSIC STREAMING

SET UP

press MFB button to connect the last intercom paired

press to re-dial
press to voice dial

press until the beep to play/pause

press to select track
press up button until the beep to share

CALL ID 'on-off'
FULLFACE HELMET/JET HELMET/AUTOMATIC VOLUME CONTROL off
VOICE ANSWER on/off
ERASE PAIRINGS
full/limited VOCAL HELP
ANYCOM SEARCH
INTERCOM DEVICE SEARCH
PAIRING MODE
LANGUAGE SELECTION

press until you hear the beep to confirm

CELLULAR ITALIA S.p.A.
www.interphone.com
Export Dept. international.interphone@cellularline.com

---

Thank you for choosing our products.
Before using this product, we recommend you carefully perform the operations outlined in this Quick Guide.

Chapter 1 - Charging
Insert the recharging cable in the audio connector kit as shown in the figure.
Insert the other end of the cable in a standard USB port.

* AC 220/110 - USB ADAPTOR

* EMERGENCY BATTERY

* USB PORT

* not included

With the double jack you can charge two Interphone MCs at the same time.
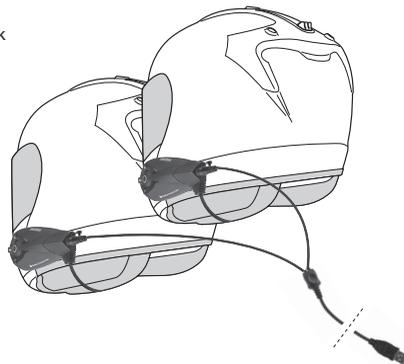
The LED lights up yellow/orange during charging.
The LED turns green when charging is complete.
When charging is complete, disconnect the units from the charger by pulling out the jack plug, and also unplug the charger from the outlet.

1a - Turning on for the first time (with the double control unit version)
To turn on the device, press the MFB button (1) on both control units. The control units are pre-linked direct from the factory. When first switched on the two control units will go into standby mode (INTERCOM menu).

1a - Turning on for the first time (with the single control unit version)
To turn on the device, press the MFB button (1). Wait for the voice message in the correct language; confirm the language selection with a quick press of the MFB button (1).
The device will go into "PAIRING MODE" at which point the following choices can be made:
- A short press of the MFB button (1) - telephone or GPS pairing.
- A short press of the UP button (2) - Interphone intercom pairing.
- A short press of the DOWN button (3) - pairing with a third party intercom (ANYCOM).
- A long press of the MFB button (1) until you a beep is heard - this cancels "PAIRING MODE". The device goes into standby mode (intercom menu) and the blue LED flashes slowly.

TURNING OFF
To turn off the device hold the MFB button the voice message "INTERPHONE POWERING DOWN" is heard at which point the red LED will remain on.

Chapter 2 - Select your language (after turning the unit on for the first time):
With the F3MC in standby mode, go to the SETUP menu and select "LANGUAGE SELECTION". Wait for the voice guide to speak in your language and then press the central MFB button (1) to confirm the selection.

If the WRONG language is selected then follow this procedure:
1. Turn off the F3MC
2. Turn on the F3MC on again
3. Briefly press the UP button
4. Briefly press the MFB button
5. Briefly press the UP button
6. When you hear the guide voice speak in your language press the MFB button.

Chapter 3 - Telephone or GPS pairing. Use one of the following procedures:
a) With the F3MC turned off, press the central MFB button (1) for 5 seconds until the two red and blue LEDs flash alternately. Briefly press the central button again and turn on the Bluetooth® function on your telephone or GPS device. Search for new devices and select INTERPHONE.
b) With the F3MC in standby mode go to the SETUP menu. Select "PAIRING MODE" and press the central MFB button (1) until you hear a beep. Turn on the Bluetooth® function on your telephone or GPS device. Search for new devices and select INTERPHONE.

Chapter 4 - Interphone Intercom pairing. Use one of the following procedures:
a) With the F3MC turned off, press the central MFB button (1) for 5 seconds until the two red and blue LEDs flash alternately and then press the upper button. The device will begin to search for a second Interphone device.
Make sure that the second Interphone device is in "PAIRING MODE" (blue and red LEDs flashing alternately, as indicated in Chapter 3/b).
b) With the F3MC in standby mode go to the SETUP menu. Select "INTERCOM DEVICE SEARCH" and press the central MFB button (1) until you hear a beep. The device will begin to search for a second Interphone device.
Make sure that the second Interphone device is in "PAIRING MODE" (blue and red

---

LEDs flashing alternately, as indicated in Chapter 3/b).
To activate or deactivate the connection press the central key on one of two F3MC devices.

Chapter 5 - Anycom - Third party intercom pairing. Use one of the following procedures:
a) With the F3MC turned off, press the central MFB button (1) for 5 seconds until the two red and blue LEDs flash alternately and then press the lower button. The device will begin to search for a second NON Interphone device.
On the second NON Interphone device activate the search for another telephone; refer to the relative user manual if necessary.
The F3MC begins to search for a second third-party device (NON Interphone device).
b) With the F3MC in standby mode go to the SETUP menu. Select "ANYCOM SEARCH" and press the central MFB button (1) until you hear a beep. The F3MC begins to search for a second third-party device (NON Interphone device).
On the second NON Interphone device activate the search for another telephone; refer to the relative user manual if necessary.

For the complete user manual please consult our website www.interphone.com

Technical Specifications			
Bluetooth® compliance:	Bluetooth® V.3.0 - Class II		
Supported Bluetooth® profiles:	HFP	A2DP	AVRCP
Dimensions mm:	60x80x30		
Weight:	44g		
Range	Up to 10 metres		
Talk time:	12h		
Stand-by time	700h		
Charging time:	3h		
Battery type;	Rechargeable Li-ion		

CE 0560

This product is CE marked in accordance with the provisions of the R&TTE Directive (1999/5/EC) and the RoHS Directive (2011/65/EU). With this CE mark Cellular Italy S.p.A. declares that this product complies with the essential requirements and other relevant provisions of the 1999/5/EC and 2011/65/EU Directives. The user is forbidden to make changes or modifications of any kind to this device. Changes or modifications not expressly approved by Cellular Italy S.p.A. will void the user's authorisation to operate the device. Bluetooth® is a trademark owned by Bluetooth SIG, Inc.
For more information please visit the website: www.interphone.com