

 cellularline

INTERPHONE START

 Bluetooth™



USER MANUAL

www.interphone.com

Thank you for purchasing the Interphone BTSTART. This headset is very easy to install on your helmet. With DSP technology, it ensures the crystal clear voice when you are riding motorcycles. Please read this guide carefully to assure safe and satisfactory operation.

CAUTION

Do not immerse in water to avoid damaging the product as well as shortening its lifetime.

DO NOT drop or apply shock to the product. Such act may cause irreparable damage to the product.

DO NOT expose the product to open flame or under the direct sunlight for a prolonged period of time. Such environment may cause malfunction or fire.

Please note: in no event our product shall be liable for any special, indirect, punitive, incidental, exemplary or consequential damages, or any damages whatsoever resulting from the usage of this product.

If anything unusual such as smoke, heat or bad smell is detected, please disconnect immediately the power and stop the usage. Continuing the use may cause electric shock or fire.

NOTE ON BATTERY CHARGE

For battery charge, use USB terminal or USB adaptor at normal temperature.


Use regulation USB terminal only. Otherwise it may cause smoke generation or fire.

When charging the battery, if any strange odor or high heat should broke out, please immediately pull the plug from the body. It may cause smoke generation or fire.

Do not leave the product in a state of charge long after the charging is completed. Such condition may cause smoking/ignition.

Charge battery at least once every six months even if the product is not use for an extended period of time. Over discharge may require battery replacement.

PRODUCT OVERVIEW

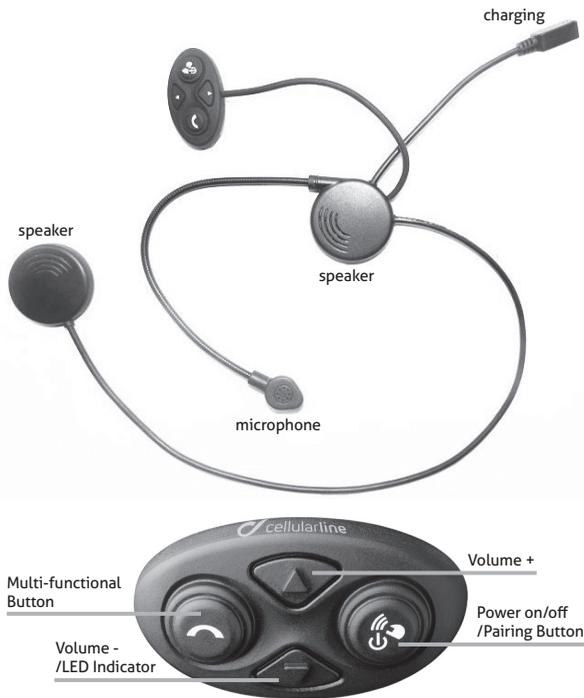

Main Functions:

- > Answering/ Rejecting calls
- > Last number redial/Voice dial
- > Bluetooth intercom
- > Stereo music
- > Connecting with GPS
- > Dual Link

ABOUT CHARGING

LED flash indicator	Indicated State
Red/Blue lights flashing alternately	Pairing state
Blue light short flash once every 2 secs.	Standby state
Blue light long flash once every 3 secs.	Connected working state
Red light flash every 3 secs.	Battery is low
Red light flashing every 1 seconds	Charging
Red light is on for a long time	Charging completed

TECHNICAL SPECIFICATION

Name of Product	BTSTART
Bluetooth Version	V3.0 Class 2
Bluetooth Profile	HSP, HFP, A2DP, AVRCP, INTERCOM
Maximum radiated peak power	<4.53dBm
Intercom Distance	10 meters
RF Frequency	2402-2480MHz
Charge Time	About 3 hours
Music Play Time	Up to 4 hours
Cell Phone Talk Time	Up to 4 hours
Intercom Talk Time	Up to 4 hours
Standby time	Up to 12 hours
Working Temperature	-15C°~45C°
Storage Temperature	-25C°~60C°

HOW TO USE

**Power on/off**

Press and hold for about 3 seconds Power on/off button, release the button when the led indicator will flash blue.
In power on state, press and hold Power on/off button for about 6 seconds, release the button when the led indicator will flash red.

**Pairing between BTSTART and Mobile phone/GPS sat nav.**

- 1) Place the BTSTART and the mobile phone in a visible area within 1 meter range.
- 2) Make sure the Bluetooth Helmet Intercom headset is in power off state.
- 3) Press and hold Power on/off Button (for about 8 seconds) until the led indicator flashes red and blue alternately. Now BTSTART is in pairing mode.
- 4) Turn on the Bluetooth on your mobile phone and start searching for new device.
- 5) Select "BTSTART" from the list to connect and if it prompts to enter password, enter <0000>. Once paired successful, LED Indicator will change from Blue/Red alternately to Blue flashing every 3 seconds. Now you can use the headset to answer you phone call, or enjoy the music from your mobile phone.

PS: Pairing password may be not necessary for some mobile.

FUNCTION OPERATIONS

**Phone call****• Answer incoming call**

Short press Multi-function button or wait for about 10s and BTSTART will answer automatically.

• Reject incoming phone call

Press Multi-function button for about 2s to reject an incoming phone call.

• Hang up call

In call active state, press Multi-function button for 2s to hang up the call.

• Last number redial

Double press the volume – (down) button (only when headset is in standby state, or music play paused state.)

• Voice Dial

Double press the volume + (up) button (only when headset is in standby state, or music play paused state.)
(Note: please make sure your Mobile Phone supports Voice Dial feature.)



STEREO MUSIC

• Pause/Play

Short press the Multi-function button once.
(Note: The above function requires the mobile phone supports Bluetooth A2DP and AVRCP)

• Play forward/backward

Press the volume + button to select next track, press the volume - button to select the previous track.

• If you have two mobile phone connected at the same time, press the Multi-functional Button once to pause the music, then long press the Multi-function button for about 2s to transfer to music of the other mobile, short press the Multi-function button once then the music of this mobile phone can be played.



PAIRING TWO BTSTART

If you want to use the Bluetooth® intercom feature, you have to pair two interphone together first.
Follow the instruction below:

- 1) Keep two interphones within 1 meter when and make sure there is no other Bluetooth headsets in pairing mode.

- 2) Press and hold Power on/off button of both Interphone BTSTART for about 8 seconds, until the led indicators of both units flash red and blue quickly and alternately, now they are in pairing mode. Then short press pairing button of one unit.
- 3) Once paired, both led will become flashing blue slowly.



BLUETOOTH INTERCOM TALKING

• Turn on Bluetooth Intercom conference

To start an Intercom conversation, press in one of two paired BTSTART

• Turn off Bluetooth Intercom conference

During intercom conversation, short press INTERCOM button in one of two BTSTART.

Volume control

To adjusting voice volume during the phone call state and Music playing state, just press and hold the volume + button to turn up the volume; press and hold the volume – button to turn down the volume. Release the Button till you feel good. When reaching the maximum or minimum volume, a tone will advise. The volume of each audio source can be individually tuned.

Noise Dependent Volume Control

The Speaker volume will be automatically increased according to the noise level, and when the noise disappeared for a while, the volume automatically restores back to the original level.



FAQ:

1. Can not power on

It might low battery, please try again after charging for 3-4 hours, then plug and unplug the USB connector to reset the device.

2. No sound

Please check if the speaker is correctly fixed, or the volume is too low.

3. Speakers have echo

Maybe they are too close to the microphone, please move the speakers away from the microphone to a normal distance.

4. Disconnect with mobile phone

Make sure if it is low battery, if not, the distance between the headset and mobile phone within 10m or between them exist obstacles that absorb frequency signals like metals or water?

5. Can not pair with mobile phone

Clear all the pairing information according to user manual, and then put the headset and mobile phone together within 1m and try to pair after entering password 0000.

6. Fail to connect with mobile phone

Please make sure the mobile phones support Bluetooth function and Bluetooth HFP, A2DP and AVRCP or other related protocols.

7. Abnormal instruction of charging indicator

- A. *When the headset haven't been used for long time or overused, it need to be pre-charge for an hour, then pull out and insert the charger, it will indicate normal charging. Please don't count the pre-charging time into normal charging time.*
- B. *Try another charging cable or charger.*

8. Whether or not support using while charging

No, we do not recommend to use while charging.



EN - This product is CE marked in accordance with the provisions of Directive R&TTE (1999/05/EC) and of Directive ROHS (2011/65/EU). With this, Cellular Italia S.p.A. declares that this product complies with the essential requirements and other relevant provisions of Directive 1999/05/EC and Directive 2011/65/EU. The user is prohibited from making any type of change or variation to the device. Variations or changes not expressly approved by Cellular Italia S.p.A will cancel the user's authorisation to use the device. Bluetooth® is a trademark owned by Bluetooth SIG, Inc.

For further information, visit the website www.interphone.com



EN - INSTRUCTIONS FOR THE DISPOSAL OF APPLIANCES FOR DOMESTIC USERS

(Applicable in countries in the European Union and those with separate waste collection systems)
This mark on the product or documentation indicates that this product must not be disposed of with other household waste at the end of its life. To avoid any damage to health or the environment due to improper disposal of waste, the user must separate this product from other types of waste and recycle it in a responsible manner to promote the sustainable re-use of the material resources.

Domestic users should contact the dealer where they purchased the product or the local government office for all the information regarding separate waste collection and recycling for this type of product. Corporate users should contact the supplier and verify the terms and conditions in the purchase contract. This product must not be mixed with other commercial waste.

This product has a battery than cannot be replaced by the user. Do not attempt to open the device to remove the battery as this could cause malfunctions and seriously damage the product. When disposing of the product, please contact the local waste disposal authority to remove the battery. The battery inside the device was designed to be able to be used during the entire life cycle of the product.



FCC Note:

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications or change to this equipment. Such modifications or change could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF exposure guidelines, this equipment should be installed and operated with a minimum distance of 5mm between the radiator and your body.

CELLULAR ITALIA S.P.A.

DECLARATION OF CONFORMITY
According to ISO/IEC 17050-1:2004

DC ENBSTART
Ver. Num. 00
to 27/05/2017

CELLULAR ITALIA S.P.A. con socio unico
Via Lambrakis, 1/A
42122 Reggio Emilia (Italy)



Declares under its own responsibility that the product

Model Number:	BTSTART
Description:	BLUETOOTH HELMET HEADSET
Product Options:	This declaration covers all options of the above product(s)

complies with the essential requirements of the following applicable European Directives, and carries the CE marking accordingly:

2014/53/EU (ex 1999/5/CE)	Radio Equipment and Telecommunications Terminal Equipment Directive (RED)
2011/65/EU	ROHS Directive

and conforms with the following product standards:

SAF	Standard
	• EN 60950-1 + A11:2009 + A1:2010 + A12:2011 +A2:2013
HEALTH	Standard
	• EN 60479 :2010
EMC	Standard
	• EN 301 489-1 V2.2.0
	• EN 301 489-17 V3.2.0
Radio	Standard
	• EN 300 328 V2.1.1

Issue Date: 27/05/2017

Paolo RAMPONI
(Technical Department Chief)
For
Piero FGLIO
(President)



CELLULAR ITALIA S.P.A. con socio unico
VIA LAMBRAKIS, 1/A - 42122 REGGIO EMILIA (ITALY) - TEL. +39 0522 33.40.02
FAX +39 0522 33.40.01 - FAX INTERNATIONAL DEPT. +39 0522 33.45.01
WWW.CELLULARITALY.COM - INFO@CELLULARITALY.COM - INTERNATIONAL@CELLULARITALY.COM
R.I. DI REGGIO EMILIA, P.IVA E C.F. 08026760960 | CAPITALE SOCIALE 7.240.000 I.V.

CELLULAR **ITALIA** S.P.A.

Via Lambrakis 1/A, 42122 Reggio Emilia, Italy

www.cellularline.com

 **cellularline**
INTERPHONE 